



MEDITERRANEAN DIVISION OF TORCUP INC.USA

20090 FIZZONASCO di Pieve Emanuele (MI) ITALY – Via del Progresso, 3
Tel. +39 02 90 42 18 53 – Fax +39 02 90 78 29 25
Web site: www.torcupmed.com - e-mail: info@torcupmed.com – PEC: torcupmed@pec.it

Electric and Pneumatic

Hydraulic Pumps

700bar

IPHP-EL500

Electric power pump 230V - 50Hz - 1.1kW - 1.5HP single phase.
Oil tank size: 6l (1.6gal).
Adjustable valve: 0 - 700bar (0 - 10000psi).
Flow rate low pressure (100bar - 1450psi): 10l/min - 610cu-in/min.
Flow rate high pressure (700bar - 10000psi): 0.9l/min - 55cu-in/min.
Electric keypad with remote control.
IP54 electric protection class.
Weight: 20kg (45lbs).



IPHP-EL1000

Electric power pump 230V - 50Hz - 1.1kW - 1.5HP single phase.
Oil tank size: 10l (2.6gal).
Adjustable valve: 0 - 700bar (0 - 10000psi).
Flow rate low pressure (100bar - 1450psi): 10l/min - 610cu-in/min.
Flow rate high pressure (700bar - 10000psi): 0.9l/min - 55cu-in/min.
Electric keypad with remote control.
Transport and protection cage with wheels and tool tray.
Electrical control panel equipped with overload relay.
IP54 electric protection class.
Weight: 25kg (55lbs).


Available also with **three-phase electric motor (380V)** and/or **automatic cycle**.



Pump without auto cycle



Pump with auto cycle

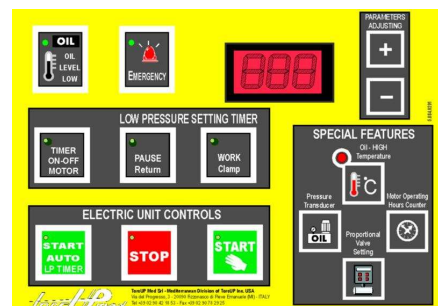

IPHP-TWIN

Electric power pump 380V 50Hz - Electric motor 5.5kW three phase.

Oil tank size: 55l (14.5gal).

Adjustable valve: 0 - 700bar (0 - 10000psi).

Flow rate low pressure (0-100bar - 0-1450psi): 14.2l/min - 866cu-in/min.

Flow rate high pressure (100-700bar - 1450-10000psi): 3l/min - 183cu-in/min.

Equipped with Heat Exchanger, Motor Stop Timer, Oil Level Indicator Lamp and Oil Filter with Sight Indicator for Choking.

Electric keypad with remote control.

Electrical control panel equipped with overload relay.

IP54 electric protection class.

Weight: 90kg (200lbs).

Available also with ***automatic cycle***.



IPHP-PN-10

Pneumatic power pump - 2.1kW - 2.8HP.

Oil tank size: 10l (2.6gal).

Adjustable valve: 0 - 700 bar (0 - 10000psi).

Flow rate low pressure (100bar - 1450psi): 10l/min - 610cu-in/min.

Flow rate high pressure (700bar - 10000psi): 0.9l/min - 55cu-in/min.

Keypad with remote control.

Transport and protection cage with wheels and tool tray.

Weight: 25kg (55lbs).

